

3 AA BATTERIES

XPP-5420BA, XPP-5420GA

INTRINSICALLY SAFE PERMISSIBLE FLASHLIGHT

NIGHTSTICK®
Life Depends on Light™



**IP-67
DUST/WATER
PROOF**

ZONE 0

**CLASS I
DIV 1**


XPP-5420BA



Large, textured buttons



Durable polymer body is
impact & chemical resistant



Sharp focused flashlight beam



**AVAILABLE IN
MULTIPLE COLORS**

XPP-5420GA



140 LUMENS

1-800-233-2155 · 1-469-326-9400 · nightstick.com

© 2021 Bayco Products Inc. Items shown are intended as a visual representation for informational purposes only and are subject to change without notice. Visit nightstick.com for product updates.

INTRINSICALLY SAFE FLASHLIGHT

3 AA BATTERIES (not included)

ITEM NUMBER/UPC

- XPP-5420BA, UPC 0 1739880805 7
- XPP-5420GA, UPC 0 1739880806 4

MARKET APPLICATIONS

- Hazardous work environments, industrial, fire and rescue

CERTIFICATIONS

- cETLus, CE, UKCA, MSHA

CASE MATERIAL

- Engineered polymer

FLASHLIGHT LUMENS/RUNTIME

- 140L, 14 hrs. runtime

CANDELA

- 7,500

BEAM DISTANCE

- 180 m

WATER RATING

- ANSI IP-67 dustproof / waterproof

DROP RATING

- 2 meters

DIMENSIONS

- LENGTH: 7.0 in (178 mm)
- HANDLE DIAMETER: 1.1 in x 1.5 in (28 mm x 38 mm)
- HEAD DIAMETER: 1.8 in (46 mm)
- WEIGHT: 7.3 oz (207 g)

POWER SOURCE


- AA batteries (not included)

WARRANTY

- Limited lifetime

WHAT'S INCLUDED

- Flashlight
- Removable lanyard

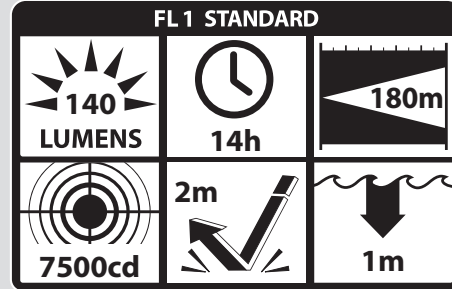

Bayco Products, Inc. XPP-5420BA
 640 S. Sanden Blvd.
 Wylie, TX 75098



Intertek



ID 4003544
 INTRINSICALLY SAFE
 SECURITE INTRINSEQUE

CLASS I DIV 1 GRPS A-D T3
 CLASS II & III DIV 1 GRPS E-G T135C
 CLASS I ZONE 0 AEx ia IIC T3 Ga
 CLASS I ZONE 0 Ex ia IIC T3 Ga
 Ⓢ I M 1 Ex ia op is I Ma
 Ⓢ II 1 G Ex ia op is IIC T3 Ga

Ex ia op is I Ma
 Ex ia op is IIC T3 Ga
 Intertek ITS 13 ATEX27837X
 IECEx ITS 16.0067X
 -20°C ≤ Tamb ≤ +40°C
 1.5V/Cell AA Alkaline

Conforms to:
 ANSI/UL STD 913, ANSI/UL 60079-0,
 ANSI/UL 60079-11 ANSI/ISA 60079-26

Certified to:
 CAN/CSA STD C22.2 No 157
 CAN/CSA STD C22.2 No 60079-0
 CAN/CSA STD C22.2 No 60079-11
 CSA STD C22.2 No 25

SEE INSTRUCTION MANUAL
 VOIR MANUEL

MFG MM-YY

Bayco Products, Inc. XPP-5420GA
 640 S. Sanden Blvd.
 Wylie, TX 75098



Intertek



ID 4003544
 INTRINSICALLY SAFE
 SECURITE INTRINSEQUE

CLASS I DIV 1 GRPS A-D T3
 CLASS II & III DIV 1 GRPS E-G T135C
 CLASS I ZONE 0 AEx ia IIC T3 Ga
 CLASS I ZONE 0 Ex ia IIC T3 Ga
 Ⓢ I M 1 Ex ia op is I Ma
 Ⓢ II 1 G Ex ia op is IIC T3 Ga

Ex ia op is I Ma
 Ex ia op is IIC T3 Ga
 Intertek ITS 13 ATEX27837X
 IECEx ITS 16.0067X
 -20°C ≤ Tamb ≤ +40°C
 1.5V/Cell AA Alkaline

Conforms to:
 ANSI/UL STD 913, ANSI/UL 60079-0,
 ANSI/UL 60079-11 ANSI/ISA 60079-26

Certified to:
 CAN/CSA STD C22.2 No 157
 CAN/CSA STD C22.2 No 60079-0
 CAN/CSA STD C22.2 No 60079-11
 CSA STD C22.2 No 25

SEE INSTRUCTION MANUAL
 VOIR MANUEL

MFG MM-YY



© 2021 Bayco Products Inc. Items shown are intended as a visual representation for informational purposes only and are subject to change without notice. Visit nightstick.com for product updates. XPP-5420A Series-Z1

